

## The combustion of sound and rotten coarse woody debris: a review

Joshua C. Hyde<sup>A,D</sup>, Alistair M. S. Smith<sup>A</sup>, Roger D. Ottmar<sup>B</sup>,  
Ernesto C. Alvarado<sup>C</sup> and Penelope Morgan<sup>A</sup>

<sup>A</sup>Department of Forest Ecology and Biogeosciences, University of Idaho, Moscow, ID 83844-1133, USA.

<sup>B</sup>USDA Forest Service, Pacific Wildland Fire Sciences Laboratory, Seattle, WA 98103-8600, USA.

<sup>C</sup>College of Forest Resources, University of Washington, Seattle, WA 98195-2100, USA.

<sup>D</sup>Corresponding author. Email: hyde.017@gmail.com

**Abstract.** Coarse woody debris serves many functions in forest ecosystem processes and has important implications for fire management as it affects air quality, soil heating and carbon budgets when it combusts. There is relatively little research evaluating the physical properties relating to the combustion of this coarse woody debris with even less specifically addressing decomposition, a condition that eventually affects all debris. We review studies evaluating the combustion and consumption of coarse woody debris in the field and under controlled conditions. The thermal properties affected by decomposition are also reviewed, as are current modelling tools to represent their combustion. Management implications and suggestions for future research are then presented.

### Introduction

Coarse woody debris (CWD) is dead, woody material in all stages of decay (Graham *et al.* 1994) with a diameter  $\geq 7.62$  cm, either resting on the ground surface or partially buried. This material accumulates as trees die through succession, insect- and disease-induced mortality, wind- and weather-induced mortality, and timber-harvesting activities (Graham *et al.* 1994). CWD serves numerous forest ecosystem functions and is abundant in most systems from  $1.1 \text{ Mg ha}^{-1}$  in some boreal forests (Krankina and Harmon 1995) to  $140 \text{ Mg ha}^{-1}$  in old-growth mixed-conifer forests (Spears *et al.* 2003). CWD has the potential to sequester several megagrams per hectare of carbon, in some instances up to 50% of a forest carbon budget (Davis *et al.* 2003), though more typically 5–10% (Manies *et al.* 2005; Table 1). If the CWD is fully or partially consumed in a wildland fire, these carbon stores can be released in the form of various carbonaceous species such as carbon monoxide (CO), carbon dioxide (CO<sub>2</sub>) and methane (CH<sub>4</sub>). Although the release of these emissions into the atmosphere can be modelled, the errors are believed to be high owing to our poor understanding of CWD combustion (Brown 2002).

Physical protection of the soil and plants (Graham *et al.* 1994) is among the ecosystem functions to which CWD are important. The importance of CWD to ectomycorrhizae, nutrient cycling and soil function is disproportionate in relation to CWD abundance (Graham *et al.* 1994). Downed logs are used by many wildlife species for cover, den sites (Maser *et al.* 1979; Bull 2002) and forage (Bull *et al.* 2001), and aquatic species dependent on healthy stream structure and function (Harmon *et al.* 1986). CWD can also influence the success of tree regeneration by creating barriers to browsing or trampling and

providing a substrate for plant germination (Ripple and Larsen 2001; Brang *et al.* 2003; Dumais and Prevost 2007). Greatly decayed CWD can hold water important to fungi and plants during dry periods (Harmon *et al.* 1986), and much non-symbiotic nitrogen is fixed in CWD (Larsen *et al.* 1978; Jurgensen *et al.* 1991; Jurgensen *et al.* 1992). Benefits to wildlife and plant regeneration are often reduced when these sources of cover and habitat are consumed by fire. However, partially combusted logs play an important role in the restoration of severely burnt areas by creating physical barriers to prevent soil erosion. Additionally, log decomposition facilitates the recovery of the organic soil matter (Wohlgemuth *et al.* 2001; Cerdà and Robichaud 2009).

The consumption of CWD by fire has management significance as well. Often CWD are prone to smouldering combustion and can continue to slowly combust long after the initial fire has passed (Brown *et al.* 2003; Rabelo *et al.* 2004). During this relatively inefficient smouldering combustion phase, CWD emit large quantities of pollutants such as greenhouse gases and particulate matter (PM) (Bertschi *et al.* 2003), thus affecting regional air quality. Additionally, smouldering logs may create a hazard by providing the embers to re-ignite fires that had previously been extinguished (Brown *et al.* 2003), an event of particular concern if a fire is re-ignited in a critical area, such as within a wildland–urban interface. Although CWD are not the primary drivers of fire behaviour when taking the approach put forth by Rothermel (1972), they often constitute a substantial portion of the forest fuelbed. For this reason, knowledge of the pre- and post-fire quantities of CWD may be important in seeking to quantify fuel heterogeneity, which is likely to be an important factor in the next generation of physics-based fire spread models.

**Table 1.** Coarse woody debris carbon estimates for a variety of ecosystems

Environment description	Carbon load (Mg ha <sup>-1</sup> )	Percentage of carbon pool	References
Upland old-growth tropical rain forest (Costa Rica)	22.3	30	Clark <i>et al.</i> (2002)
10-year seedling stands of <i>Nothofagus</i> forest (New Zealand)	87.4	58	Davis <i>et al.</i> (2003)
25-year sapling stands of <i>Nothofagus</i> forest (New Zealand)	51.4	45	Davis <i>et al.</i> (2003)
120-year pole stands of <i>Nothofagus</i> forest (New Zealand)	13.0	6	Davis <i>et al.</i> (2003)
>150-year mature stands of <i>Nothofagus</i> forest (New Zealand)	11.3	6	Davis <i>et al.</i> (2003)
Mixed oak–pine forest, pre-burn (United States)	7.6	8	Hubbard <i>et al.</i> (2004)
Mixed oak–pine forest, post-burn (United States)	0.9	8	Hubbard <i>et al.</i> (2004)

Despite the effects of CWD combustion on ecology, regional air quality, and the representation of fuel beds, there are relatively few studies that evaluate the combustion of these fuels (Hao and Babbit 2007), or address the physical properties of CWD that may influence combustion (Tillman 1981; Kanury 1994; Veras and Alvarado 2006). The need to understand these physical properties, and their relative significance in the combustion process, is essential for decomposing CWD as these have undergone several physical and chemical changes that potentially affect consumption by fire. To address the concerns outlined above, our goal for this paper is to review research that has evaluated and developed models to predict the combustion of sound and decayed CWD, and to synthesise studies that have investigated the relationships between wood properties and combustion. Field inventory and estimation of CWD, being topics unto themselves, are outside the scope of this review, and have been addressed in several recent studies (Bate *et al.* 2004; Sikkink and Keane 2008; Pesonen *et al.* 2009). The present review will conclude by describing areas of further research. Though the term coarse woody debris has been used broadly in the past to refer to downed logs, snags and large branches (Harmon *et al.* 1986), we will focus only on downed logs and large downed branches.

### Combustion and consumption experiments on CWD

Since the early 1970s, many scientists have documented the ecological role of CWD and the effects its combustion has on the environment (Tables 1, 2). These studies have addressed both the consumption, via mass or volume loss, and combustion processes in field and controlled laboratory settings. Most of the combustion studies in the field incorporate sound and decayed (rotten) CWD in harvested forests of the western United States or Mato Grosso, Brazil. Field studies focussing on CWD consumption have also been conducted in Australia (Tolhurst *et al.* 2006). The most common result of these studies has been the development of regression equations incorporating a variety of explanatory variables to predict consumption (Norum 1976; Sandberg and Ottmar 1983; Brown *et al.* 1991; Carvalho *et al.* 2002).

#### *Experiments in temperate ecosystems*

In the western United States, regression equations for CWD consumption have incorporated several explanatory variables. In the interior West, Norum (1976) predicted large fuel loads consumed based on fine fuel loading ( $\leq 0.63$ -cm diameter), large rotten fuel loading ( $\geq 7.62$  cm diameter) and lower duff

moisture content. In the Pacific Northwest Sandberg and Ottmar (1983) initially sought to correlate consumption with tree species, bark presence, contact with the ground and fuel moisture before determining this latter variable to be the most influential in debris consumption. Fuel moisture was a strong predictor of CWD consumption both in spring and fall (autumn) burning conditions (Ottmar *et al.* 1990). The relationship of increasing moisture content with decreased consumption was supported by Brown *et al.* (1991), who evaluated spring and fall burns of mixed-conifer logging slash in the inland north-west. This relationship between fuel moisture and consumption is reasonable given the increased energy required to drive water from wood during the heat-up and drying phases of combustion (Tillman 1981).

Differences in the combustion of sound and decayed CWD have also been observed. For example, Brown *et al.* (1985) evaluated a regression equation for consumption of sound CWD, developed in fall burns (Sandberg and Ottmar 1983). When applied to data from fall burns incorporating sound and rotten CWD (Ryan 1982) and spring and fall (Norum 1976) burns, the algorithm underpredicted consumption of decayed CWD by 35%. Similarly, relative increases in consumption of decayed CWD have been observed in interior logging slash burned in the fall, and undisturbed Australian forests in fall and summer (Tolhurst *et al.* 2006).

Recent work focusses less on CWD consumption and more on environmental effects. Researchers investigating the effect of CWD combustion on regeneration and root mortality conducted in the north-western United States found large (~40-cm diameter) decayed logs produced higher soil surface temperatures than did large sound logs (Monsanto and Agee 2008). This, and the above studies, indicate differences in the combustion and effects of sound and decayed CWD; however, little research is available specifically comparing their physical and chemical properties, which would be likely to affect combustion and consumption.

#### *Experiments in tropical ecosystems*

Research in CWD combustion in tropical ecosystems has focussed on creating a better understanding of the smouldering process and its relation to carbon emissions (Carvalho *et al.* 2001; Carvalho *et al.* 2002; Rabelo *et al.* 2004). These studies characterised carbon emission by quantifying the consumption of biomass (Carvalho *et al.* 2001), and have led to advances in our knowledge about the smouldering processes within CWD (Carvalho *et al.* 2002; Rabelo *et al.* 2004).

**Table 2. Coarse woody debris (CWD) combustion experiments by region, variables investigated, focus of study, fuel type, and log condition**  
NEON, National Ecological Observatory Network

Ecoregion (NEON region if applicable)	Variables investigated	Focus of study	Fuel type	Log condition	Reference
North central Rockies (12)	Fuel loads $\leq 7.62$ cm, fuel moisture content, duff moisture content, shrub loading, grass and forb loading, fuel depth, slope, wind speed, duff depth, average small tree diameter, fire intensity	Consumption	Natural, mature <i>Pseudotsuga menziesii</i>	Unspecified	Norum (1976) <sup>A</sup>
North central Rockies (12)	Season, position of logs, type of activity, diameter, moisture content	Consumption	Post-harvest conifer forest	Sound and decayed	Brown <i>et al.</i> (1991)
Pacific Northwest (16)	Measured and estimated fuel moisture, species, bark presence and contact with the ground	Consumption	Post-harvest <i>Pseudotsuga menziesii</i> and <i>Tsuga heterophylla</i>	Sound	Sandberg and Ottmar (1983)
Pacific Northwest (16)	Measured and estimated fuel moisture for 10-, 100- and $\geq 1000$ -h fuels	Consumption	Post-harvest <i>Pseudotsuga menziesii</i> and <i>Tsuga heterophylla</i>	Sound	Ottmar <i>et al.</i> (1990)
Tropics	C/H/N ratio, density, diameter, moisture content, porosity	Smouldering speed	Post-harvest tropical forest	Sound	Rabelo <i>et al.</i> (2004)
Tropics	Border width and curing time	Consumption, carbon emissions, soil heating, seasonal variations in consumption	Post-harvest tropical forest	Sound	Carvalho <i>et al.</i> (2001) <sup>A</sup>
Pacific Northwest (16)	Combustion temperature, potential root damage	Soil heating	Logs removed from field	Sound and decayed	Monsanto and Agee (2008)
Tropics	Combustion temperature, moisture content, size, species	Factors initiating and sustaining smoulder	Post-harvest tropical forest	Sound and decayed	Carvalho <i>et al.</i> (2002)
Intermountain, Pacific Northwest, and interior Alaska (12, 16)	Forest floor fuel loading, moisture content, weather	Consumption	Natural and harvested <i>Pinus ponderosa</i> , <i>Picea mariana</i> , <i>Abies</i> spp., and mixed hardwood	Sound	Ottmar <i>et al.</i> (2006)
South-west Australia	Physical dimensions, density, decay state	Consumption	Natural eucalypt	Sound and decayed	Tolhurst <i>et al.</i> (2006)

<sup>A</sup>Indicates CWD was included in the study, but not the primary topic of interest.

Table 3. Decay classification originally presented in Fogel et al. (1973)

Feature	Log decay class				
	1	2	3	4	5
Bark	Intact	Intact	Trace	Absent	Absent
Twigs <0.003 m	Present	Absent	Absent	Absent	Absent
Specific gravity (dimensionless)	0.474	–	0.420	0.222	0.046
Texture	Intact	Intact, partly soft	Hard, large pieces	Soft, small, blocky pieces	Soft, powdery
Wood colour	Original, colour	Original colour	Reddish brown or original colour	Reddish or light brown	Red-brown to dark brown
Epiphytes	None	None	Conifer seedlings	<i>Vaccinium</i> , moss, <i>Tsuga heterophylla</i> seedlings	<i>Vaccinium</i> , moss, <i>T. heterophylla</i> seedlings
Invading roots	None	None	Conifer seedlings	<i>Vaccinium</i> , moss, TSHE seedlings	<i>Vaccinium</i> , moss, TSHE seedlings
Fungi fruiting	Similar to Class 4	<i>Cyathus</i> , <i>Tremella</i> , <i>Mycena</i> , <i>Collybia</i> , <i>Polyporus</i> , <i>Fomes</i> , <i>Pseudohydnum</i>	<i>Polyporus</i> , <i>Polyporellus</i> , <i>Pseudohydnum</i> , <i>Fomes</i>	<i>Cortinarius</i> , <i>Mycena</i> , <i>Marasmius</i>	<i>Cortinarius</i> , <i>Collybia</i> , <i>Cantharellus</i>

Researchers studying the smouldering process evaluated fibrous logs burned in the field and laboratory. They found samples that were consumed almost completely during the smouldering period and concluded this process was controlled by a combination of oxygen supply and heat loss. Field observations showed smouldering was mainly propagated in very porous logs, and the formation of permeable ash facilitated combustion by insulating the smouldering front from heat losses (Carvalho et al. 2001; Carvalho et al. 2002). Similar conditions facilitating smouldering combustion were observed by Rabelo et al. (2004), who recorded several characteristics of logs undergoing smouldering combustion. Researchers found CWD that sustained smouldering had pore sizes that varied between 10 and 2000 nm in diameter (Rabelo et al. 2004). The smouldering fronts in these porous logs advanced depending on day and night temperatures, chemical and physical properties, location on the site, and position in relation to the ground. The rate at which smouldering fronts advanced ranged from 0.4 to 7.5 cm per h (Rabelo et al. 2004). The latter speed was observed in debris alternating between smouldering and flaming combustion.

**Variations in CWD properties**

The foci of this section are the varying properties of CWD that affect combustion. These include both physical properties such as density and porosity, and surface area-to-volume ratio, as well as other properties likely to vary within CWD such as moisture content, lignin and cellulose content, and thermal properties, which dictate how heat moves through these materials. As CWD ages, it is altered by weather and fungal decay, undergoing several physical and chemical changes that affect thermal properties. Characterising these changes in the context of CWD is difficult owing to the limited number of studies that specifically describe CWD properties with regards to combustion (Tillman 1981). However, literature on physical and chemical properties influencing the combustion of small wood samples in a laboratory setting is more easily located. In this section, we will review these properties, their changes with decay, and how they affect CWD combustion. For a review of the smouldering process itself, the authors recommend the recent review on the subject by Rein (2009).

*CWD decay classification*

Often when physical properties of CWD are described, they are related to degree of decay. One of the most common methods of quantifying degree of decomposition of CWD in the United States is the use of a simple five-category decay classification system such as the one used by Fogel et al. (1973). The majority of the categories (Table 3) rely predominately on easily observable physical features, typical examples of which may be seen in Fig. 1. This system provides a reference point for communicating the degree of decay of CWD. Originally developed for Douglas-fir (*Pseudotsuga menziesii*) in the Cascade ecoregion of the United States, the system has been used to assess decay in numerous species and ecosystems for a variety purposes including the characterisation of debris for wildlife (Maser et al. 1979), CWD dynamics through time (Spies et al. 1988), and fire effects monitoring (Lutes et al. 2006).



Fig. 1. Typical examples of mixed conifer coarse woody debris (CWD) in the decay classification system based on Maser *et al.* (1979).

In some cases, judging decay by the outward appearance of the logs may be a poor indicator of their overall condition. For example, logs occupying very dry exposed sites in southern Norway have appeared sound on the outside only to be decayed within (Næsset 1999). In this instance, referred to as case-hardening, decay is slowed on the surface of the log owing to inhospitable environmental conditions. Location of decay may also present some difficulty in applying this classification; several tree species are prone to heart rots, in which the core becomes rotten but the outer layers of wood remain sound.

#### *Thermal properties of CWD by decomposition*

Steinhagen (1977) published a collection of data from various sources that allow one to estimate the conductivity, diffusivity and specific heat of many species of wood in temperatures ranging from 233 to 373 K and moisture contents of up to 130%. In this case, diffusivity refers to the ability of the wood to absorb heat from its surroundings, more precisely defined by Simpson and TenWolde (1999) as the ratio of conductivity and the product of the wood density and heat capacity. TenWolde *et al.* (1988) discuss heat transfer across the wood grain, and Ragland *et al.* (1991) provide a broad summary of values describing thermal, physical and chemical properties of wood.

Data for conductivity and diffusivity for CWD in various stages of decay do not appear to be present in published literature. Characterisation of the thermal properties of decomposed wood tends to focus on the heat of combustion associated with specific species. Dobry *et al.* (1986) examined the heat of combustion via semi-micro calorimeter for spruce (*Picea* spp.) affected by brown rots (*Fomitopsis pinicola* and *Serpula lacrymans*) and compared these with beech (*Fagus* spp.) wood affected by white rots (*Pleurotus ostreatus* and *Lentinus tigrinus*), and sound samples of spruce and beech. The brown rot-affected spruce produced more joules per gram than either white rot-affected beech or sound samples after they had lost 30% of their solid mass. Higher heats of combustion per gram in relation to sound wood were also observed in white-rotted (*Fomes ignarius*) aspen (*Populus tremuloides*) using a differential scanning calorimeter (Knoll *et al.* 1993). This makes sense considering the positive correlation between lignin and heat of combustion (White 1987), and the preference of some decay fungi, such as brown rot fungi, to utilise cellulose and leave behind higher concentrations of lignin.

#### *Density*

The five-category decay classification system is easy to apply, but fairly subjective. Assigning a class to a log can occasionally be challenging as downed logs can frequently exhibit characteristics from multiple decay classes (Pyle and Brown 1999). Another potential method of assessing decay is by measuring the dry wood density in grams per cubic centimetre, often abbreviated by the Greek letter  $\rho$  in the literature. Decreasing density with decay has been documented by several studies (Sollins 1982; Means *et al.* 1985; Sollins *et al.* 1987; Busse 1994), as displayed in Fig. 2 along with the reported relationships to the decay classification system. The overall decline in density with decomposition holds true in all species displayed.

Densities, and moisture, influence the thermal conductivity and diffusivity of wood (Simpson and TenWolde 1999). Generally, logs of lower density have reduced thermal conductivity compared with more dense or sound material. However, as experiments have demonstrated, less consumption of decayed wood relative to sound wood is not usually found. Density is incorporated in consumption modelling (Albini *et al.* 1995) and mathematical representations of combustion (de Souza Costa and Sandberg 2004); however, its influence in the combustion and consumption of CWD may be overshadowed by other variables such as heat losses to the environment, which have a greater influence on smoulder velocity (Rein 2009), and have been shown to be significant factors for CWD combustion (Carvalho *et al.* 2001, 2002).

#### *Lignin and cellulose content*

The heat of combustion of wood increases as the ratio of lignin to holocellulose increases (Demirbas and Demirbas 2009). This can be seen in the data recorded by Dobry *et al.* (1986) and Knoll *et al.* (1993). Tillman (1981) describes the combustion process of lignin and holocellulose, and energy values for various species based on lignin content have been summarised by White (1987). Advancing decay influences this ratio (Schmidt 2006) and examples of various heat contents with various decayed samples can be seen in the 'thermal properties' subsection above.

#### *Percentage moisture content*

As moisture content increases, more energy is required to remove water during the preheating and drying phases before

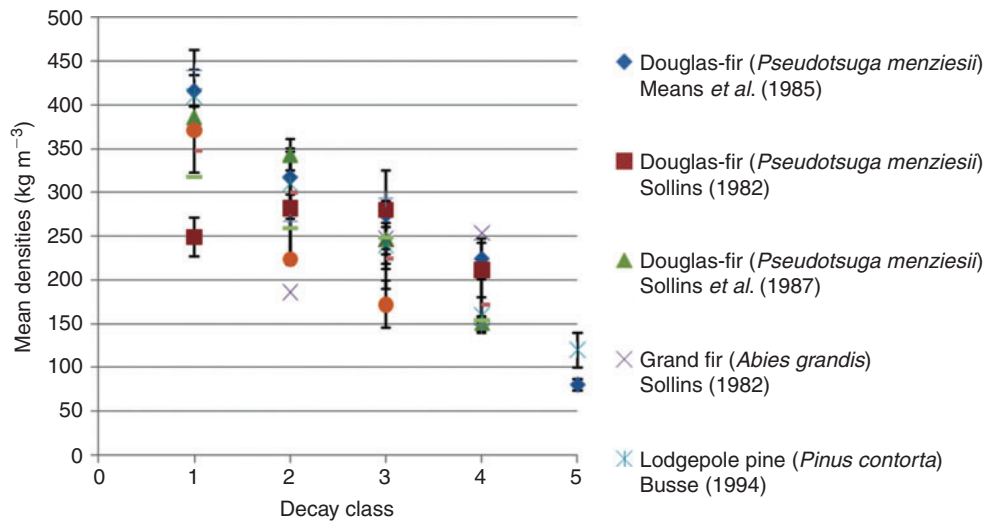


Fig. 2. Wood density changes with advancing decay in North American coniferous tree species. Standard error bars omitted where no standard error was provided.

volatile gases can be produced (Tillman 1981). For example, it has been estimated that to raise fully dried woody fuel temperatures from 298 to 673 K requires  $0.42 \text{ J kg}^{-1}$ ; however,  $1.46 \text{ J kg}^{-1}$  are needed for the same temperature increase in wood with 100% moisture content (Shafizadeh and DeGroot 1977). Prescribed fire research focussing on consumption of sound woody debris has yielded strong relationships between moisture content and consumption (Sandberg and Ottmar 1983; Ottmar *et al.* 1990). Similar findings have been observed in a laboratory setting. Stockstad (1979) found increasing moisture content, from 15 to 24%, required more time to ignite decayed ponderosa pine (*Pinus ponderosa*), Douglas-fir (*Pseudotsuga menziesii*) and subalpine fir (*Abies lasiocarpa*). Even after ignition occurs, moisture content will affect combustion by influencing the flame temperature (Babrauskas 2006), rate of combustion (Dadkhah-Nikoo and Bushnell 1994) and the volume of products resulting from combustion (Dadkhah-Nikoo and Bushnell 1994). With regard to CWD, logs in a more advanced state of decay may have a higher water-holding capacity than their sound counterparts.

#### Porosity

Porosity, in addition to sufficient surface area-to-volume ratio and gas permeability, is among the properties necessary for a material to undergo sustained smouldering (Ohlemiller 1985; Drysdale 1998) and is often abbreviated as  $\phi$  in literature. Porosity has been noted as having an effect on fuel combustion and consumption during field studies. Carvalho *et al.* (2002) found ignition of sound CWD to occur only in highly porous or fibrous samples, and Rabelo *et al.* (2004) characterised pore sizes for their smouldering fuels as ranging from 10 to 1000 nm or larger. In the mathematical model of a smouldering log by de Souza Costa and Sandberg (2004), higher moistures are expected with fuels with less pore space.

In a controlled setting, Flournoy *et al.* (1991) evaluated the affect of decay on wood porosity and found that the pore size of sweetgum (*Liquidambar styraciflua*) inoculated with brown rot

fungi (*Postia placenta*) increased to a range of 1.2–3.8 nm. These diameters are obviously much smaller than those noted by Rabelo *et al.* (2004), but give reason to expect more pore space in decayed wood than in sound wood. We looked for but found no studies documenting changes in CWD porosity with advancing decay during periods of time exceeding 1 month.

#### Surface area-to-volume ratio

The surface area-to-volume ratio has been demonstrated to be a critical factor in the sustained combustion of CWD (Carvalho *et al.* 2002). Rein (2009) indicates higher ratios provide more area for the smouldering front to access oxygen. In work with Douglas-fir logs in the Cascade ecoregion, Means *et al.* (1985) found the surface area-to-volume ratio of CWD to increase as decay became more advanced, though they reported some degree of this observation to be an attribute of the tree circumference during the time of mortality. Furthermore, changes in surface area-to-volume ratio might also be expected given the type of fragmentation produced by brown cubicle rot. Grier (1978) observed a decrease in CWD volume with time since death; however, the ratio of surface area to this value was not noted. Although this change in surface area-to-volume ratio is plainly visible, few studies document this characteristic over extended periods of time.

Another aspect often ignored in the literature is the fact that logs often tend to crack longitudinally, especially near the combustion zone (Veras and Alvarado 2006) where smoke and heat have been observed to emerge. This fracturing may significantly increase the surface-area-to-volume ratio. The effect of log cracks has not been included in empirical or theoretical studies of CWD consumption.

#### Modelling CWD combustion

The inclusion of CWD is key to modelling total fuel consumption and subsequent emissions.

CWD is not addressed in fire behaviour and spread models that are based on Rothermel's (1972) fire spread equation, as

these systems operate under the premise of fine-fuel-driven spread and behaviour. This omission of CWD puts these fire behaviour and spread models outside the scope of this section. It is worth noting, however, that the US National Fire Danger Rating System (NFDRS) does include CWD ( $\geq 7.6$ -cm diameter) as a way of tracking seasonality of fire hazard (Burgan 1988). CWD does play a substantial role in modelling fuel consumption, heat flux and subsequent emissions, and it is these 'fire effect' and 'emission' models that will be the focus of this section. The role of CWD in physical and semi-empirical models is described below.

### Physical models

There are several physical models that take into account mass transfer, thermal properties and detailed fuel inputs to represent the drying, pyrolysis and smouldering combustion of fuels and estimate both the mass loss and rate of smoulder. The term 'fuels' is used instead of 'CWD' in this instance because many models have been developed and validated with wood samples combusted on a small scale, whereas specific CWD combustion models are rare. However, given the physics-based nature of these models, they should apply equally well to CWD given adequate input information. For example, Mardini *et al.* (1996) and Peters and Bruch (2003) report thermal properties derived from laboratory experiments of wood combustion. These authors concluded that experimental and predicted results for heat-up, drying and pyrolysis were in good agreement under different fuel particle sizes and boundary conditions and that their data were applicable to large particle sizes.

Recent works representing combustion of wood have varied in their foci. Broad-application works such as those by Bilbao *et al.* (2001) have created models to represent the piloted and spontaneous ignition and subsequent smouldering rate of wood. Bryden and Hagge's (2003) representation of pyrolysis and modelling focussed on the influence of structural changes, heat transfers, and the pyrolysis process and rate in wood, and Rostami *et al.* (2004) developed a smouldering model stressing the importance of surface heat loss, heat of combustion, airflow rate and porosity on temperature and smouldering velocity. Mardini *et al.* (1996) developed a model to represent the heat and mass transfer in a wildland fire setting. This model was compared with the combustion of wooden dowels and found to be in good agreement with observed data.

More specific to CWD is de Souza Costa and Sandberg's one-dimensional mathematical model of a smouldering log (de Souza Costa and Sandberg 2004). This model represents burn rates, temperature profiles, and positions of the drying, pyrolysis and smouldering fronts. Variations in parameters such as moisture content, diameter, pyrolysis temperature, heat of char oxidation, heat of pyrolysis, porosity, density and char density are considered. This model agreed well with experimental data from Carvalho *et al.* (2002) (de Souza Costa and Sandberg 2004). A major conclusion from the latter study was that the model's performance could potentially be improved by incorporating data on finite rate kinetics for the drying and pyrolysis processes, diffusion of oxygen into porous char with volumetric char oxidation, axisymmetric burning, tar formation and deposition, and reactions inside char pores (de Souza Costa and Sandberg

2004). Furthermore, Veras and Alvarado (2006) developed a two-dimensional numerical model for prediction of smouldering front propagation and gas emissions of cylindrical logs. The numerical results of the simulations were found to be in good agreement with validation data from Carvalho *et al.* (2002).

Other authors have studied the combustion process on small-diameter fuel particles. For instance, Mardini *et al.* (1996) conducted an experimental and analytical study of heat and mass transfer in wooden dowels. Their model fails to predict mass during the drying phase because of the rapid water migration in small-diameter fuels. Peters and Bruch (2003) were able to predict mass loss of fir and spruce wood particles by including an evaporation temperature model. The results of the two previous works stress the importance of fuel moisture as a predictor variable for consumption.

### Semi-empirical models

Physical models of combustion allow the incorporation of numerous inputs to represent the combustion of materials largely regardless of their spatial position. In representing combustion in a forest setting, the presence of other fuels, varying moisture contents and factors such as slope can alter the combustion CWD; variations in these factors are difficult to account for in fine-scale detail owing to the heterogeneity of forest fuels. It is in this area that semi-empirical models can be useful tools to represent combustion and consumption of fuels. The semi-empirical consumption models that were located for this review include Consume 3.0, Fire Emissions Production Simulator 1.1.0 (FEPS) and First Order Fire Effects Model 5.7 (FOFEM). These models enable users to input different variables to describe the surrounding fuels (Table 4) and subsequently report predicted fuels consumption and emissions information (Table 5).

#### Consume

Consume predicts fuel consumption, energy released during fire, and emissions of particulate matter, carbon monoxide, carbon dioxide, methane, and non-methane hydrocarbons (Prichard *et al.* 2005). Empirically derived consumption equations based on physical combustion properties were developed from data compiled and analysed for forested, woodland, shrubland and grassland ecosystems throughout the United States. The software requires fuel characteristics, lighting patterns, fuel conditions and meteorological attributes to populate the equations that drive the energy and emissions outputs. To use Consume, the operator must specify whether the fuel bed of interest is the result of an activity, such as harvesting, or natural accumulation. If activity is selected, it is assumed that the CWD is relatively sound and equations developed for sound wood are used for all large woody fuels. This is because the quantity of rotten wood in an activity plot is assumed to be fairly small. From this point on, the model selects the appropriate equation based on fuel moisture, days of curing, and the consumption of 100-h (2.54–7.62-cm) fuels.

In the event that natural fuels are selected, Consume selects consumption equations determined by the size class of fuel and the decay class. These equations originated from the work by Ottmar *et al.* (1990) and other studies occurring in the western

**Table 4. Inputs required by semi-empirical models**

An 'x' indicates that there are specific fields for these data within the user interface of the model. Asterisks indicate there are specific fields for these variables that are not labelled; however, there are unassigned stratified fields for these data to be included. FEPS, Fire Emissions Production Simulator; FOFEM, First Order Fire Effects Model; CWD, coarse woody debris

Inputs model	Consume	FEPS	FOFEM
<b>Fuel inputs</b>			
1-h fuel loading	x	*	x
10-h fuel loading	x	*	x
100-h fuel loading	x	*	x
1000-h fuel loading	x	*	x
>1000-h fuel loading	x	*	x
≥1000-h sound and rotten	x		x
<b>Percentage</b>			
Branch loading			x
Canopy loading	x	x	x
Duff depth	x		x
Duff loading	x	x	x
Herbaceous or foliage loading	x		x
Litter depth	x		
Litter loading		x	x
Litter percentage cover	x		
Shrub loading	x	x	x
Slash (broadcast) loading		x	
Slash (pile) loading	x	x	
Snag loading	x		
<b>Moisture content inputs</b>			
1-h fuel		x	
10-h fuel	x	x	
100-h fuel		x	x
1000-h fuel	x	x	
≥1000-h fuel			x
Duff	x	x	x
Live fuel		x	
<b>Other inputs</b>			
Activity or natural fuelbed	x		x
Burn area	x		
Cover type	x	x	x
Distribution of CWD			x
Fire shape		x	
Ecoregion	x	x	x
Ignition pattern	x		
Pasquill stability		x	
Percentage canopy consumed	x	x	x
Season			x
Slope	x		
Wind speed (midflame)	x		
Tree dimension measurements			x

or boreal forests (Prichard *et al.* 2005). The ≥50.8-cm diameter log consumption equation is based on a small dataset in which many of the logs sampled were rotten. The large woody fuel equations only exist for western and boreal forests and these equations are used to represent south-eastern US forests (Prichard *et al.* 2005).

#### *Fire Emissions Production Simulator (FEPS)*

Fire Emissions Production Simulator (FEPS) is the modified Emissions Production Model (EPM) (Anderson *et al.* 2004).

**Table 5. Outputs generated by semi-empirical models**

An 'x' indicates that there are specific fields for these data within the user interface of the model. Asterisks indicate these outputs are all grouped into one number. PM, particulate matter; NMHC, non-methane hydrocarbons

Outputs model	Consume	FEPS	FOFEM
<b>Consumption</b>			
Crown	x	*	x
Duff	x	*	x
Herbaceous	x		x
Litter	x	*	x
Percentage woody fuel	x	*	x
Shrub	x	*	x
<b>Emissions</b>			
PM <sub>10</sub>	x		x
PM <sub>2.5</sub>	x	x	x
CH <sub>4</sub>	x	x	x
CO	x	x	x
CO <sub>2</sub>	x		x
NMHC	x		
Oxides of nitrogen			x
SO <sub>2</sub>			x
Displays heat release	x		x
Displays results by hour		x	
Displays results by combustion phase		x	x
Plum rise		x	
Buoyancy		x	
<b>Heat release</b>			
Crown	x		
Herbaceous	x		
Litter consumed	x		
Overall intensity	x		
Percentage woody fuel consumed	x		
Shrub	x		
Soil temperature			x
<b>Mortality</b>			
Tree			x

FEPS predicts fuel consumption, percentage flaming versus smouldering combustion, emissions of particulate matter, carbon monoxide and methane, and plume height based on inputs of fuel loading, moisture content and a variety of constants developed from the literature and expert opinion. There is no stratification by large fuel size or sound and rotten.

#### *First Order Fire Effects Model (FOFEM) and BURNUP*

The First Order Fire Effects Model (FOFEM) predicts fuel consumption, emissions of 2.5- and 10-µm particulate matter (PM<sub>2.5</sub> and PM<sub>10</sub>), methane, carbon dioxide, carbon monoxide, oxides of nitrogen and sulfur dioxide, as well as tree mortality and soil heating (Reinhardt *et al.* 1997). Inputs required for FOFEM include fuel loading by size class, fuel moisture, duff depth and percentage of CWD that is rotten, as well as information on the abundance of ground fuels. Tree species are required for the mortality section. FOFEM uses the BURNUP model to predict the consumption of woody debris such as CWD (Reinhardt 2005).

The BURNUP model uses a mix of heat transfer theory and empirical observations that replaced earlier work by Albini



(Albini 1976; Albini and Reinhardt 1995). It bases consumption on the calculated time to ignition and heat transfer of woody fuels subjected to a fire environment. Once the fuel loading by size class has been input, a given heat source is applied to the fuels. Depending on the time required for ignition and heat transfer, the model determines whether woody fuels have ignited and are being consumed. Calculations were derived by observing forest fuels, sound and rotten, immersed in flame (Albini and Reinhardt 1995). Empirical data from crib and field burns were used to calibrate the equations (Albini *et al.* 1995).

### Discussion: research and management needs

#### *CWD combustion experiments and properties*

Experiments evaluating the combustion of CWD *in situ* will benefit from research focussing on multiple geographic areas. Although locations in the western United States and some areas of tropical forest in Brazil often host field burns to evaluate CWD combustion, other systems such as boreal and deciduous forests are under-represented. Due to variations in multiple field conditions such as moisture, CWD position and the CWD itself, differing locations may exhibit different results when consumption is evaluated. Capturing and documenting this variability would increase available data that, for empirical and semi-empirical models, could be used to improve or develop new algorithms to represent consumption, or to validate the effectiveness of current algorithms in representing consumption in new locations. New datasets could also be used by modellers to evaluate the agreement between physical and semi-empirical model outputs and the results from burns occurring in various field conditions. Additionally, most experiments have taken place in logging slash, leaving little data available to represent natural fuels. On a landscape scale, in both harvested and natural fuels, further investigation should be performed to investigate the effectiveness of quantifying CWD consumption using remote sensing techniques, especially under varying degrees of severity (Lentile *et al.* 2006). One recent experiment has taken place in an African savannah (Smith and Hudak 2005); however, there is the need to repeat this study in other regions.

#### *CWD properties*

We know more about consumption of sound CWD than we do about decaying CWD, yet more rotten wood burns. Without deeper understanding of why and how decaying wood burns, predictions of biomass consumption, residual carbon, soil effects and other ecological effects will be less accurate. To understand the combustion process within CWD, we must know the various chemical and physical states this fuel occupies. Although detailed information about the role of chemical composition, moisture, density, surface area-to-volume ratio, and to some degree porosity have been collected in fine-scale laboratory experiments, the relative influence of all these factors combined during the combustion and consumption of wildland fuels is seldom described, and poorly understood. Research that evaluates all of these factors and their relative influence in the combustion of CWD will improve our understanding of this process and allow researchers the opportunity to improve combustion theory with which physically based models can be driven.

#### *Modelling CWD combustion*

There have been several physical-based models to represent the combustion of biomass and wood in phases ranging from heating up to self-sustained smoulder. Evaluating these models for agreement with CWD data would be a useful step forward in their application for these fuels; as yet, only the model developed by de Souza Costa and Sandberg specifically addresses CWD, but there is little reason to believe other models are not just as suitable given accurate inputs. Evaluating models for application to CWD would greatly benefit from published values on the properties of CWD in varying conditions and ecosystems, as detailed descriptions of all the inputs required for these models are either scattered throughout various subjects, incomplete or not available.

Semi-empirical models such as Consume and FOFEM have been developed to incorporate the consumption of both sound and decayed CWD. However, sound and the decayed state is often defined broadly as partially decomposed wood that fragments on impact, as in the definition used for Consume, or they are not readily defined in the documentation, as is the case with FOFEM. This current accounting of decayed CWD does not stratify beyond 'sound' and 'rotten'. Examination of relevant literature shows little if any published work to indicate either the effectiveness of this current level of stratification, or the potential gains in accuracy that could be achieved by more detailed stratification, especially one that could define the ranges of wood properties likely to affect combustion.

#### *Management implications*

Above, we have outlined areas of research that would further our understanding of CWD combustion and our representation of this process in models for scientific and management applications. Better understanding and representation of CWD consumption is likely to facilitate more precise modelling tools to predict CWD consumption and post-fire loading. This allows land managers and fire managers to better predict how their activities affect the systems they are tasked with managing.

Better estimates of CWD consumption also have the potential to improve estimates of air quality effects from these fuels, especially when we consider that it is often the estimates of fuel consumed that are our biggest sources of error during the development of these estimates. This aspect of management is of particular importance as air quality standards become increasingly stringent, such as the new particulate matter standards promulgated by the United States Environmental Protection Agency in 2007 (US EPA 2007). Additionally CWD can account for large quantities of carbon (Table 1). Better estimates of the consumption of this material will also allow for more accurate accounting of carbon emissions due to the volatilisation of these fuels.

### Conclusion

This review has summarised existing research relating to the combustion and consumption of CWD. We recommend research aimed at improving the characterisation of these fuels, improving our understanding of the relative influence of wood properties on combustion, and increasing the number of ecosystems in which *in situ* burn data are collected. Specifically,

current literature does not characterise multiple variables affecting combustion of CWD with regards to their relative importance during the combustion process. More information on this subject would improve our basic understanding of combustion in these fuels. Current models in use would benefit from on-site burns in multiple ecosystems, which could be used for validation, and to potentially improve existing algorithms. The effectiveness of these models could also be enhanced by investigating the need for stratification to address decayed fuel, and to what degree stratification is necessary. This would allow us to better address the heterogeneity inherent in CWD.

More research in these areas would provide modellers with information to further develop their products in such a way as to more accurately represent the complexity of surface fuels commonly consumed by fire in a variety of ecosystems. Increasing the accuracy of consumption estimates gives managers and researchers more accurate information on how much material will exist in the post-fire environment for wildlife use, tree regeneration and carbon storage. This would also allow improved emissions production estimates, which could be incorporated into dispersion and concentration models.

### Acknowledgements

This work was supported with funding from the National Wildfire Coordinating Group Smoke Committee (SmoC), formerly the Fire Air Coordination Team (FACT) via the National Park Service. This work was partially supported by the National Science Foundation Idaho EPSCoR Program and by the National Science Foundation under award number EPS 0814387.

### References

- Albini FA (1976) 'Computer-based Models of Wildland Fire Behavior: a User's Manual.' USDA Forest Service, Intermountain Forest and Range Experiment Station. (Ogden, UT)
- Albini FA, Reinhardt ED (1995) Modeling ignition and burning rate of large woody natural fuels. *International Journal of Wildland Fire* **5**, 81–91. doi:10.1071/WF9950081
- Albini FA, Brown JK, Reinhardt ED, Ottmar RD (1995) Calibration of a large fuel burnout model. *International Journal of Wildland Fire* **5**, 173–192. doi:10.1071/WF9950173
- Anderson GK, Sandberg DV, Norheim RA (2004) Fire Emissions Production Simulator (FEPS) User's Guide Version 1.0. Available at [http://www.fs.fed.us/pnw/fera/fepe/FEPS\\_users\\_guide.pdf](http://www.fs.fed.us/pnw/fera/fepe/FEPS_users_guide.pdf) [Verified 1 February 2011]
- Babrauskas V (2006) Effective heat of combustion for flaming combustion of conifers. *Canadian Journal of Forest Research* **36**, 659–663. doi:10.1139/X05-253
- Bate LJ, Torgersen TR, Wisdom MJ, Garton EO (2004) Performance of sampling methods to estimate log characteristics for wildlife. *Forest Ecology and Management* **199**, 83–102. doi:10.1016/J.FORECO.2004.04.021
- Bertschi I, Yokelson RJ, Ward DE, Babbitt RE, Susott RA, Goode JG, Hao WM (2003) Trace gas and particle emissions from fires in large-diameter and belowground biomass fuels. *Journal of Geophysical Research* **108**(8), 1–12.
- Bilbao R, Mastral JF, Aldea ME, Ceamanos J, Betran M, Lana JA (2001) Experimental and theoretical study of the ignition and smoldering of wood including convective effects. *Combustion and Flame* **126**, 1363–1372. doi:10.1016/S0010-2180(01)00251-6
- Brang P, Moran J, Puttonen P, Vyse A (2003) Regeneration of *Picea engelmannii* and *Abies lasiocarpa* in high-elevation forests of south-central British Columbia depends on nurse logs. *Forestry Chronicle* **79**(2), 273–279.
- Brown JK, Marsden MA, Ryan KC, Reinhardt ED (1985) Predicting woody fuel consumed by prescribed fire in the Northern Rocky Mountains. USDA Forest Service, Intermountain Forest and Range Experiment Station, Research Paper INT 337. (Ogden, UT)
- Brown JK, Reinhardt ED, Fischer WC (1991) Predicting duff and woody fuel consumption in northern Idaho prescribed fires. *Forest Science* **37**, 1550–1566.
- Brown JK, Reinhardt ED, Kramer KA (2003) Coarse woody debris: managing benefits and fire hazard in the recovering forest. USDA Forest Service, Rocky Mountain Research Station, General Technical Report RMRS-GTR-105. (Ogden, UT)
- Brown S (2002) Measuring carbon in forests: current status and future challenges. *Environmental Pollution* **116**, 363–372. doi:10.1016/S0269-7491(01)00212-3
- Bryden KM, Hage MJ (2003) Modeling the combined impact of moisture and char shrinkage on the pyrolysis of a biomass particle. *Fuel* **82**, 1633–1644.
- Bull EL (2002) The value of coarse woody debris to vertebrates in the Pacific Northwest. In 'Proceedings of the Symposium on the Ecology and Management of Dead Wood in Western Forests', 2–4 November 1999, Reno, NV. (Eds WF Laudenslayer Jr, PJ Shea, BE Valentine, CP Weatherspoon, TE Lisle) USDA Forest Service, Pacific Southwest Research Station, General Technical Report PSW-GTR-181, pp. 171–178. (Albany, CA)
- Bull EL, Torgersen TR, Wertz TL (2001) The importance of vegetation, insects, and neonate ungulates in black bear diet in north-eastern Oregon. *Northwest Science* **75**, 244–253.
- Burgan RE (1988) 1988 Revisions to the 1978 National Fire Danger Rating System. USDA Forest Service, Southeastern Forest Experiment Station, Research Paper SW-273. (Asheville, NC)
- Busse MD (1994) Downed bole-wood decomposition in lodgepole pine forests of central Oregon. *Soil Science Society of America Journal* **58**, 221–227. doi:10.2136/SSSAJ1994.03615995005800010033X
- Carvalho JA, Jr, de Souza Costa F, Veras CAG, Sandberg DV, Alvarado EC, Gielow R, Serra AM, Jr, Santos JC (2001) Biomass fire consumption and carbon release rates of rainforest clearing experiments conducted in Northern Mato Grosso, Brazil. *Journal of Geophysical Research* **106**(D16), 17 877–17 887
- Carvalho ER, Veras CAG, Carvalho JA, Jr (2002) Experimental investigation of smoldering in biomass. *Biomass and Bioenergy* **22**, 283–294. doi:10.1016/S0961-9534(02)00005-3
- Cerdà A, Robichaud PR (Eds) (2009) 'Fire Effects on Soils and Restoration Strategies.' Vol. 5, Land Reconstruction and Management series. (Science Publishers: Enfield, NH)
- Clark DB, Clark DA, Brown S, Oberbaur SF, Veldkamp E (2002) Stocks and flows of coarse woody debris across a tropical rain forest nutrient and topography gradient. *Forest Ecology and Management* **164**, 237–248. doi:10.1016/S0378-1127(01)00597-7
- de Souza Costa F, Sandberg D (2004) Mathematical model of a smoldering log. *Combustion and Flame* **139**, 227–238. doi:10.1016/J.COMBUST.FLAME.2004.07.009
- Dadkhah-Nikoo A, Bushnell DJ (1994) An experimental investigation of wood combustion. *Journal of Energy Resources Technology* **116**(3), 186–193.
- Davis MR, Allen RB, Clinton PW (2003) Carbon storage along a stand development sequence in a New Zealand *Nothofagus* forest. *Forest Ecology and Management* **177**, 313–321. doi:10.1016/S0378-1127(02)00333-X
- Demirbas T, Demirbas C (2009) Fuel properties of wood species. *Energy Sources A – Recovery, Utilization and Environmental Effects* **31**, 1464–1472. doi:10.1080/15567030802093153

- Dobrý J, Dziurzyński A, Rypáček P (1986) Relation between combustion heat and chemical wood composition during white and brown rot. *Wood Science and Technology* **20**, 137–144.
- Drysdale D (1998) 'An Introduction to Fire Dynamics.' (Wiley: Chichester, UK)
- Dumais D, Prevost M (2007) Management for red spruce conservation in Quebec: the importance of some physiological and ecological characteristics – a review. *Forestry Chronicle* **83**, 378–392.
- Flournoy DS, Kirk TK, Highley TL (1991) Wood decay by brown-rot fungi: changes in pore structure and cell wall volume. *Holzforschung* **45**, 383–388. doi:10.1515/HFSG.1991.45.5.383
- Fogel R, Ogawa M, Trappe JM (1973) Terrestrial decomposition: a synopsis. University of Washington, Coniferous Forest Biome, Internal Report 135. (Seattle, WA)
- Graham RT, Harvey AE, Jurgensen MF, Jain TB, Tonn JR, Page-Dumroese DS (1994) Managing coarse woody debris in forests of the Rocky Mountains. USDA Forest Service, Intermountain Research Station, Research Paper INT-RP-477. (Ogden, UT)
- Grier CC (1978) A *Tsuga heterophylla*-*Picea sitchensis* ecosystem of coastal Oregon: decomposition and nutrient balance of fallen logs. *Canadian Journal of Forest Research* **8**, 198–206. doi:10.1139/X78-031
- Hao WM, Babbit RE (2007) Smoke produced from residual combustion. USDA Forest Service, Rocky Mountain Research Station, Fire Sciences Laboratory, Final Report JFSP-98-1-9-0. (Missoula, MT)
- Harmon ME, Franklin JF, Swanson FJ, Sollins P, Gregory SV, Lattin JD, Anderson NH, Cline SP, Aumen NG, Sedell JR, Lienkamper GW, Cromack K, Jr, Cummings KW (1986) Ecology of coarse woody debris in temperate ecosystems. In 'Advances in Ecological Research'. (Eds A MacFadyen, ED Ford) pp. 133–302. (Harcourt Brace Jovanovich: New York)
- Hubbard RM, Vose JM, Clinton BD, Elliott KJ, Knoepp JD (2004) Stand restoration burning in oak–pine forests in the southern Appalachians: effects on aboveground biomass and carbon nitrogen cycling. *Forest Ecology and Management* **190**, 311–321. doi:10.1016/J.FORECO.2003.10.021
- Jurgensen MF, Tonn JR, Graham RT, Harvey AE, Geier-Hayes K (1991) Nitrogen fixation in forest soils of the Inland Northwest. In 'Proceedings – Management and Productivity of Western Montane Forest Soils', 10–12 April 1990, Boise, ID. (Eds AE Harvey, LF Neuenschwander) USDA Forest Service, Intermountain Research Station, General Technical Report INT-280, pp. 101–109. (Ogden, UT)
- Jurgensen MF, Graham RT, Larsen MJ, Harvey AE (1992) Clear-cutting, woody residue removal, and non-symbiotic nitrogen fixation in forest soils of the Inland Pacific Northwest. *Canadian Journal of Forest Research* **22**, 1172–1178. doi:10.1139/X92-155
- Kanury A (1994) Combustion characteristics of biomass fuels. *Combustion Science and Technology* **97**, 469–491. doi:10.1080/00102209408935391
- Knoll CS, Wong BM, Roy DN (1993) The chemistry of decayed aspen wood and perspectives on its utilization. *Wood Science and Technology* **27**, 439–448. doi:10.1007/BF00193867
- Krankina ON, Harmon ME (1995) Dynamics of the dead wood carbon pool in north-western Russian boreal forest. *Water, Air, and Soil Pollution* **82**, 227–238. doi:10.1007/BF01182836
- Larsen MJ, Jurgensen MF, Harvey AE (1978) N<sub>2</sub> fixation associated with wood decayed by some common fungi in western Montana. *Canadian Journal of Forest Research* **8**, 341–345. doi:10.1139/X78-050
- Lentile LB, Holden ZA, Smith AMS, Falkowski MJ, Hudak AT, Morgan P, Lesis SA, Gessler PE, Benson NC (2006) Remote sensing techniques to assess active fire characteristics and post-fire effects. *International Journal of Wildland Fire* **15**, 319–345. doi:10.1071/WF05097
- Lutes DC, Keane RE, Caratti JF, Key CH, Benson NC, Sutherland S, Gangi LJ (2006) FIREMON: fire effects monitoring and inventory system. USDA Forest Service, Rocky Mountain Research Station, General Technical Report RMRS-GTR-164-CD. (Fort Collins, CO)
- Manies KL, Harden JW, Bond-Lamberty BP, O'Neill KP (2005) Woody debris along an upland chronosequence in boreal Manitoba and its impact on long-term carbon storage. *Canadian Journal of Forest Research* **35**, 472–482. doi:10.1139/X04-179
- Mardini J, Lavine A, Dhir V (1996) Heat and mass transfer in wooden dowels during a simulated fire: an experimental and analytical study. *International Journal of Heat and Mass Transfer* **39**, 2641–2651. doi:10.1016/0017-9310(95)00374-6
- Maser C, Anderson RG, Cromack K, Jr, Williams JT, Cummins KW (1979) Dead and down woody material. In 'Wildlife Habitats in Managed Forests, the Blue Mountains of Oregon and Washington'. USDA Forest Service, Agricultural Handbook 553. (Ed. J Thomas) (Washington, DC)
- Means JF, Jr, Mac KC, Millan PC (1985) Comparison of decomposition models using wood density of Douglas-fir logs. *Canadian Journal of Forest Research* **15**, 1092–1098. doi:10.1139/X85-178
- Monsanto PG, Agee JK (2008) Long-term post-wildfire dynamics of coarse woody debris after salvage logging and implications for soil heating in dry forests of the eastern Cascades, Washington. *Forest Ecology and Management* **255**, 3952–3961. doi:10.1016/J.FORECO.2008.03.048
- Næsset E (1999) Relationship between relative wood density of *Picea abies* logs and simple classification systems of decayed coarse woody debris. *Scandinavian Journal of Forest Research* **14**, 454–461. doi:10.1080/02827589950154159
- Norum RA (1976) Fire intensity–fuel reduction relationships associated with understorey burning in larch/Douglas-fir stand. In 'Montana Fire Ecology Conference and Fire and Land Management Symposium, No. 14, 1974'. pp. 559–572. (Tall Timbers Research Station: Tallahassee, FL)
- Ohlemiller T (1985) Modeling of smoldering combustion propagation. *Progress in Energy and Combustion Science* **11**, 277–310. doi:10.1016/0360-1285(85)90004-8
- Ottmar RD, Hall JN, Vihnanek RE (1990) Improved prediction of fuel consumption during spring-like prescribed burns. USDA Forest Service, Pacific Northwest Research Station, Final report. (Seattle, WA)
- Ottmar RD, Prichard SJ, Vihnanek RE, Sandberg DV (2006) Modification and validation of fuel consumption models for shrub and forested lands in the Southwest, Pacific Northwest, Rockies, Midwest, Southeast, and Alaska. USDA Forest Service, Pacific Northwest Research Station, Pacific Wildland Fire Sciences Laboratory, Final Report JFSP-98-1-9-06. (Seattle, WA)
- Pesonen A, Leino O, Maltamo M, Kangas A (2009) Comparison of field sampling methods for assessing coarse woody debris and use of airborne laser scanning as auxiliary information. *Forest Ecology and Management* **257**, 1532–1541. doi:10.1016/J.FORECO.2009.01.009
- Peters B, Bruch C (2003) Drying and pyrolysis of wood particles: experiments and simulation. *Journal of Analytical and Applied Pyrolysis* **70**, 233–250. doi:10.1016/S0165-2370(02)00134-1
- Prichard SJ, Ottmar RD, Anderson GK (2005) 'Consume User's Guide Version 3.0.' USDA Forest Service, Pacific Wildland Fire Sciences Laboratory. (Seattle, WA)
- Pyle C, Brown MM (1999) Heterogeneity of wood decay classes within hardwood logs. *Forest Ecology and Management* **114**, 253–259. doi:10.1016/S0378-1127(98)00356-9
- Rabelo ERC, Veras CAG, Carvalho JA, Jr, Alvarado EC, Sandberg DV, Santos JC (2004) Log smoldering after an Amazonian deforestation fire. *Atmospheric Environment* **38**, 203–211. doi:10.1016/J.ATMOSENV.2003.09.065
- Ragland KW, Aerts DJ, Baker AJ (1991) Properties of wood for combustion analysis. *Bioresource Technology* **37**, 161–168. doi:10.1016/0960-8524(91)90205-X

- Rein G (2009) Smouldering combustion phenomena in science and technology. *International Review of Chemical Engineering* **1**, 3–18.
- Reinhardt E (2005) Using FOFEM 5.0 to estimate tree mortality, fuel consumption, smoke production and soil heating from wildland fire. Available at <http://www.fire.org/downloads/fofem/5.2/FOFEM5Using.pdf> [Verified 31 January 2011]
- Reinhardt ED, Keane RE, Brown JK (1997) First Order Fire Effects Model: FOFEM 4.0, user's guide. USDA Forest Service, Intermountain Research Station, General Technical Report, INT-GTR-344. (Ogden, UT)
- Ripple WJ, Larsen EJ (2001) The role of post-fire coarse woody debris in aspen regeneration. *Western Journal of Applied Forestry* **16**, 61–64.
- Rostami A, Murthy J, Hajaligol M (2004) Modeling of smoldering process in a porous biomass fuel rod. *Fuel* **83**, 1527–1536. doi:10.1016/J.FUEL.2003.11.018
- Rothermel RC (1972) A mathematical model for predicting fire spread in wildland fuels. USDA Forest Service, Intermountain Forest and Range Experiment Station, Research Paper INT-115. (Ogden, UT)
- Ryan KC (1982) Burning for site preparation on steep-slope helicopter-logged clearcuts in north-western Montana. In 'Site Preparation and Fuels Management on Steep Terrain'. (Ed. DM Baumgarther) pp. 25–33. (Washington State University Cooperative Extension: Spokane, WA)
- Sandberg DV, Ottmar RD (1983) Slash burning and fuel consumption in the Douglas-fir subregion. In 'Seventh Conference on Fire and Forest Meteorology Symposium Proceedings', 25–28 April 1983 Fort Collins, CO. pp. 90–93. (American Meteorological Society: Fort Collins, CO)
- Schmidt O (2006) 'Wood and Tree Fungi Biology, Damage, Protection, and Use.' (Springer-Verlag: Heidelberg)
- Shafizadeh F, DeGroot WF (1977) Thermal analysis of forest fuels. In 'Fuels and Energy from Renewable Resources'. (Eds DA Tillman, KV Sarkanen, LL Anderson) pp. 93–114. (Academic Press: New York)
- Sikkink PG, Keane RE (2008) A comparison of five sampling techniques to estimate surface fuel loading in montane forests. *International Journal of Wildland Fire* **17**, 363–379. doi:10.1071/WF07003
- Simpson W, TenWolde A (1999) Physical properties and moisture relations of wood. In 'The Wood Handbook – Wood as an Engineering Material'. USDA Forest Service, General Technical Report 112, pp. 3-1–3-24. (Madison, WI)
- Smith AMS, Hudak A (2005) Estimating combustion of large downed woody debris from residual white ash. *International Journal of Wildland Fire* **14**, 245–248. doi:10.1071/WF05011
- Sollins P (1982) Input and decay of woody debris in coniferous stands in western Oregon and Washington. *Canadian Journal of Forest Research* **12**, 18–28. doi:10.1139/X82-003
- Sollins P, Cline SP, Verhoeven T, Sachs D, Spycher G (1987) Patterns of log decay in old-growth Douglas-fir forests. *Canadian Journal of Forest Research* **17**, 1585–1595. doi:10.1139/X87-243
- Spears JDH, Holub SM, Harmon ME, Lajtha K (2003) The influence of decomposing logs on soil biology and nutrient cycling in an old-growth mixed coniferous forest in Oregon, USA. *Canadian Journal of Forest Research* **33**, 2193–2201.
- Spies TA, Franklin JF, Thomas TB (1988) Coarse woody debris in Douglas-fir forests of western Oregon and Washington. *Ecology* **69**, 1689–1702. doi:10.2307/1941147
- Steinhagen HP (1977) Thermal conductive properties of wood, green or dry, from –40 to +100°C: a literature review. USDA Forest Service, Forest Products Laboratory, General Technical Report FPS-9. (Madison, WI)
- Stockstad DS (1979) Spontaneous and piloted ignition of rotten wood. USDA Forest Service, Intermountain Forest and Range Experiment Station, Research Note INT-RN-267. (Ogden, UT)
- TenWolde A, McNatt JD, Krahn L (1988) Thermal Properties of Wood and Wood Panel Products for Use in Buildings. Oak Ridge National Laboratory, ORNL/Sub/87–21697/1. (Oak Ridge, TN)
- Tillman DA (1981) Review of mechanisms associated with wood combustion. *Wood Science* **13**, 177–184.
- Tolhurst KG, Anderson WR, Gould J (2006) Woody fuel consumption experiments in an undisturbed forest. *Forest Ecology and Management* **234**(Suppl. 1), 109. doi:10.1016/J.FORECO.2006.08.145
- US EPA (2007) Clean air fine particle implementation rule. *Federal Register* **72**(79), 20 586–20 667.
- Veras CAG, Alvarado EC (2006) The role of smoldering combustion on smoke emission in tropical forest fires. *Forest Ecology and Management* **234**(Suppl. 1), S159.
- White RH (1987) Effect of lignin content and extractives on the higher heating value of wood. *Wood and Fiber Science* **19**, 446–452.
- Wohlgemuth P, Hubbert K, Robichaud P (2001) The effects of log erosion barriers on post-fire hydrologic response and sediment yield in small forested watersheds, southern California. *Hydrological Processes* **15**, 3053–3066. doi:10.1002/HYP.391

Manuscript received 17 October 2009, accepted 17 June 2010